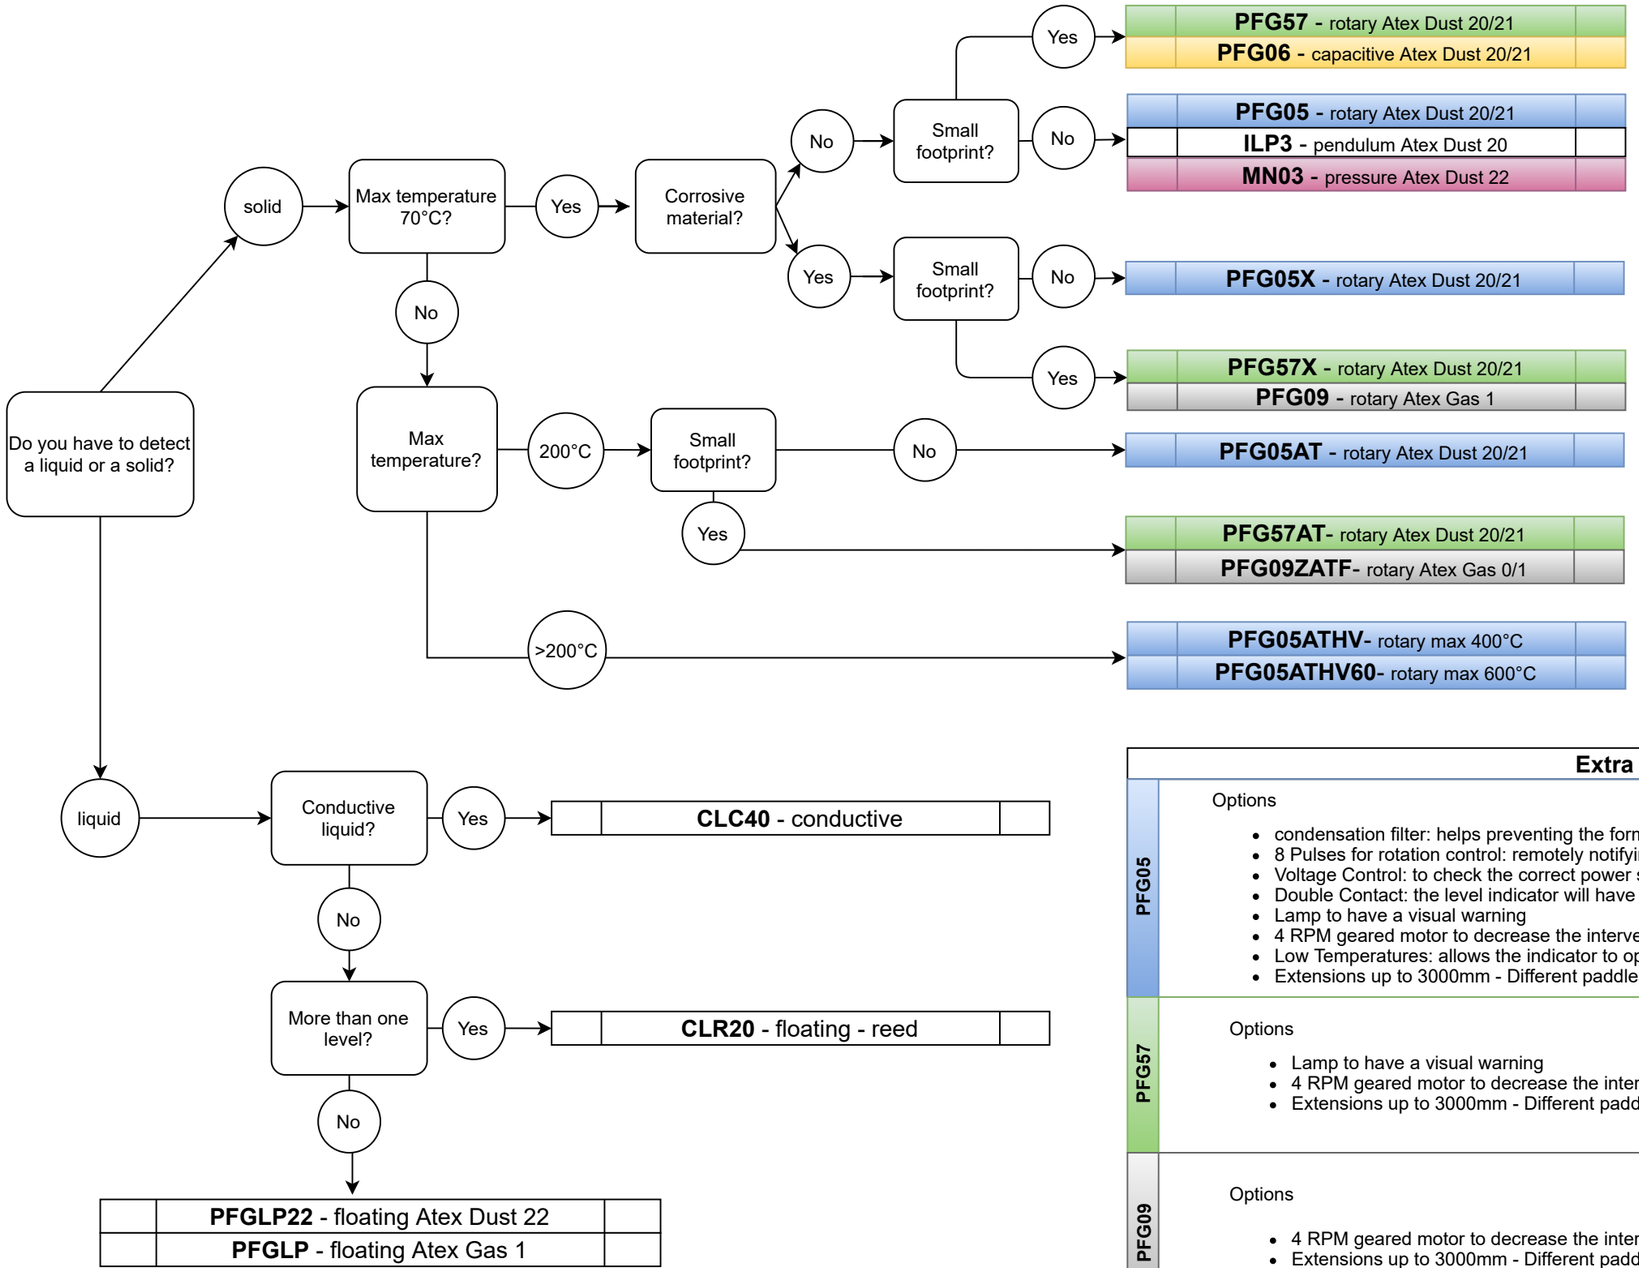

Extra information

PFG05

Options

- condensation filter: helps preventing the formation of condensation in the level indicator casing
- 8 Pulses for rotation control: remotely notifying that the level indicator is working correctly
- Voltage Control: to check the correct power supply of the level indicator.
- Double Contact: the level indicator will have one additional dry contact.
- Lamp to have a visual warning
- 4 RPM geared motor to decrease the intervention time of the level indicator
- Low Temperatures: allows the indicator to operate up to -27°C.
- Extensions up to 3000mm - Different paddles

PFG57

Options

- Lamp to have a visual warning
- 4 RPM geared motor to decrease the intervention time of the level indicator
- Extensions up to 3000mm - Different paddles

PFG09

Options

- 4 RPM geared motor to decrease the intervention time of the level indicator
- Extensions up to 3000mm - Different paddles

PFG06

Options

- Lamp to have a visual warning
- Extensions up to 3000mm

MN03

Options

- Lamp to have a visual warning
- Viton membrane